



# CP SERIES

## Submersible Pump

General Data

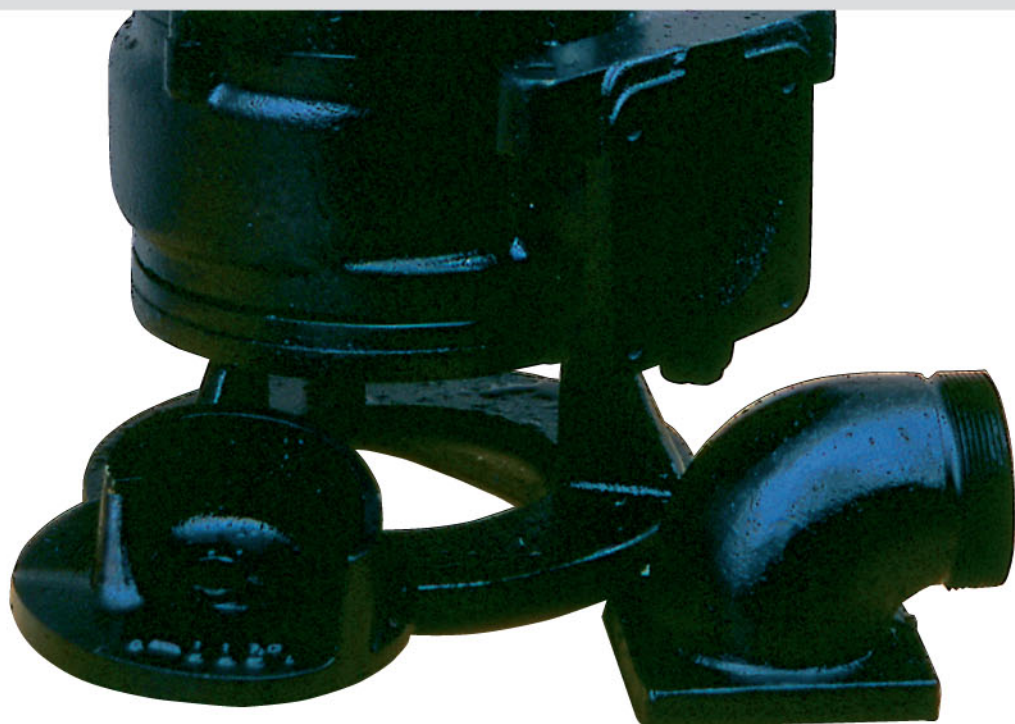

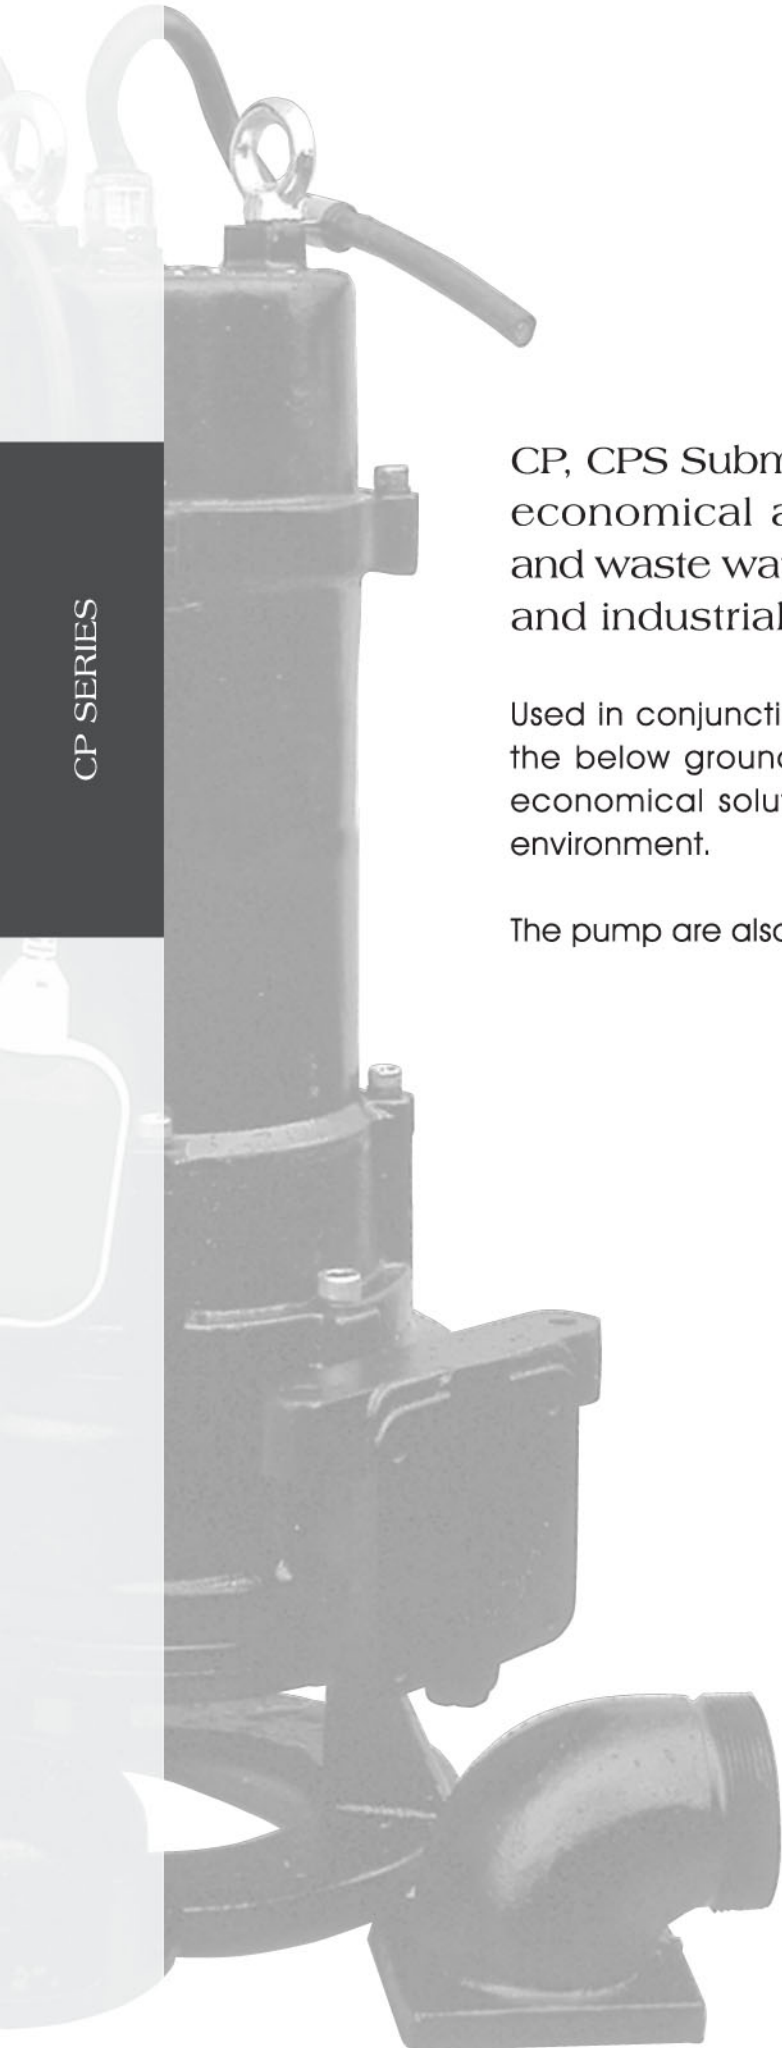

CP, CPS Submersible Pump are designed for economical and reliable pumping of clear and waste water from commercial, communal and industrial sources.

Used in conjunction with the automatic coupling system the below ground level wet installation is a particularly economical solution which also does not damage the environment.

The pump are also suitable for quick portable applications.

- Maximum Temperature : +40°
- Materials
  - Casing : Cast Iron FC20
  - Shaft : Stainless Steel SUS316
  - Impeller : Cast Iron FC20
  - Fasteners : Stainless Steel SUS304
  - Special materials on request

### Pump Mode Code






CP	Cutter Pump
(S)	S – Single Phase
150	P2 / 100kw
--	
2	2 pole or 4 pole motor
H	Impeller size S – Smaller impeller M – Middle impeller H – Large impeller
(A)	With float switch automatic type



NO	Model	Capacity (m <sup>3</sup> /h)	Head (m)	Power (kw)	Speed (rpm)	Outlet (Ømm)	Phase	Weight (kg)	Solids passed (Ømm)
1	CP75 - 2H(A)	10	8	0.75			3	35	35
	CPS75 - 2H(A)						1		
2	CP100 - 2H(A)	10	13	1		50GAK	3	40	40
	CPS100 - 2H(A)	10	9				1		
3	CP150 - 2H(A)	10	18	1.5			3	40	40
	CPS150 - 2H(A)	10	15				1		
4	CP100 - 2M(A)	17	6	1			3	35	40
	CPS100 - 2M(A)						1		
5	CP150 - 2M(A)	20	9	1.5	2900		3	40	40
	CPS150 - 2M(A)						1		
6	CP220 - 2H(A)	15	18	2.2		80GAK		55	50
7	CP220 - 2M(A)	30	13						
8	CP300 - 2H(A)	20	22	3				57	50
9	CP300 - 2M(A)	35	14						
10	CP400 - 2H(A)	20	25	4				85	100
11	CP400 - 2M(A)	40	15						
12	CP400 - 4M	100	6		1450	100GAK		120	100
13	CP550 - 2H	65	15			80GAK	3	175	65
14	CP550 - 2M	30	24	5.5	2900	100GAK		185	100
15	CP550 - 2S	65	15						
16	CP550 - 4S	100	8		1450	150GAK		200	100
17	CP750 - 2H	45	29	7.5				175	65
18	CP750 - 2M	70	20						
19	CP750 - 2S	80	15						
20	CP750 - 4S	150	10		1450	150GAK		200	100






CP  
75-2H(A)  
—  
CP  
150-2M(A)

CP75-2H(A)  
CP100-2H(A)  
CP100-2M(A)  
CP150-2H(A)  
CP150-2M(A)

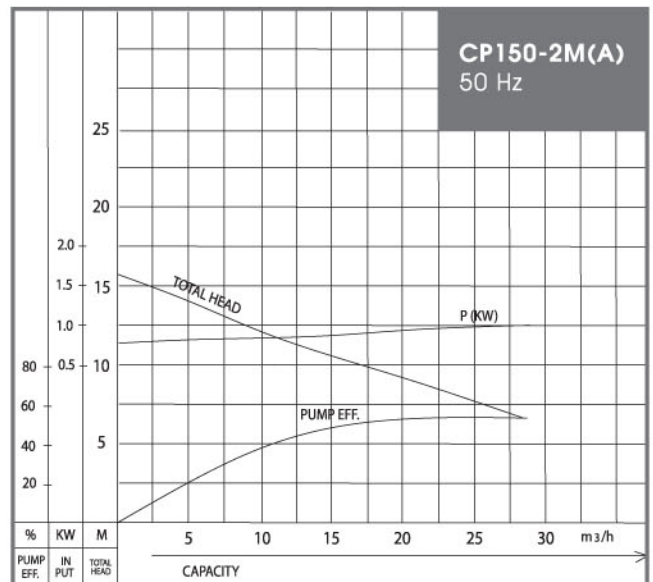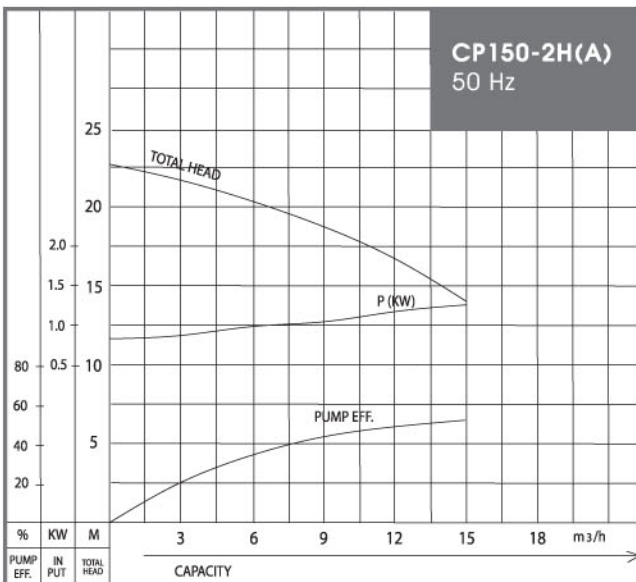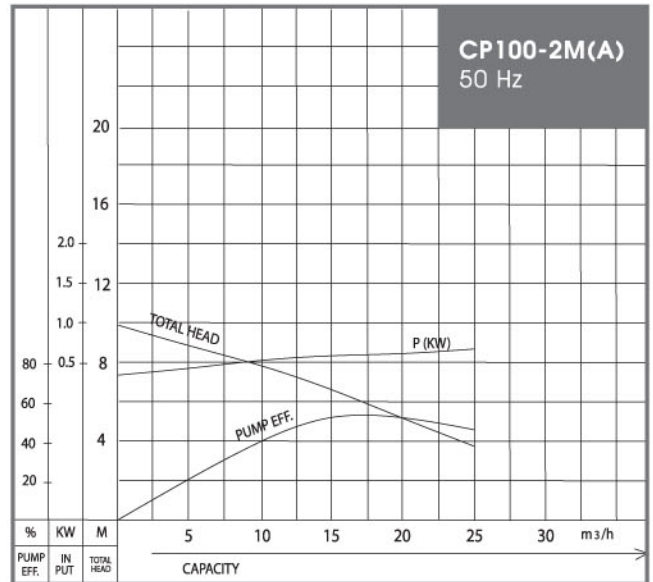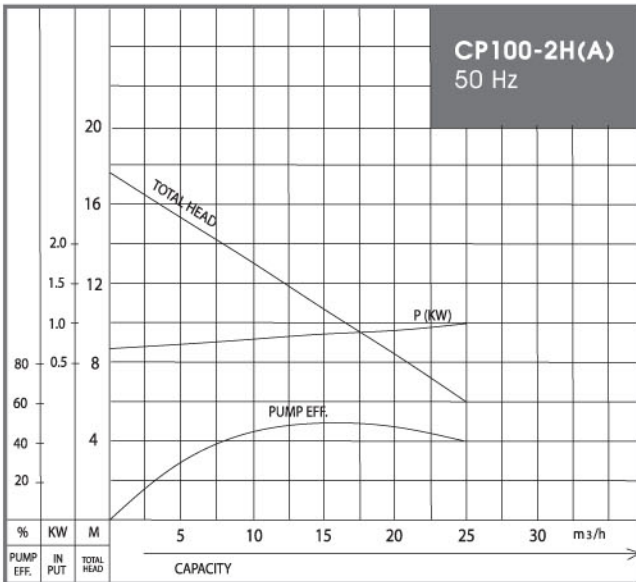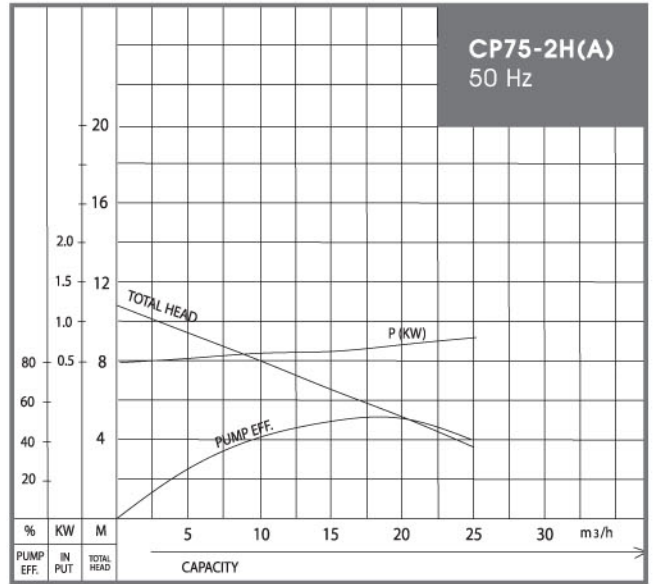

CP  
220-2H(A)  
—  
CP  
400-2H(A)

CP220-2H(A)  
CP220-2M(A)  
CP300-2H(A)  
CP300-2M(A)  
CP400-2H(A)

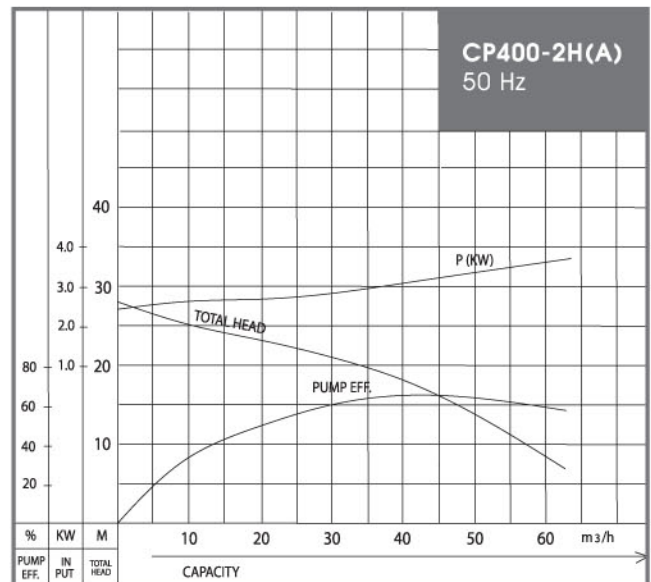
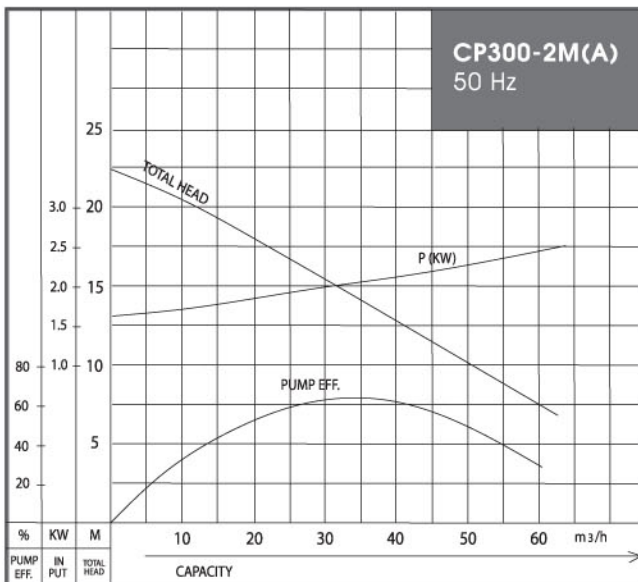
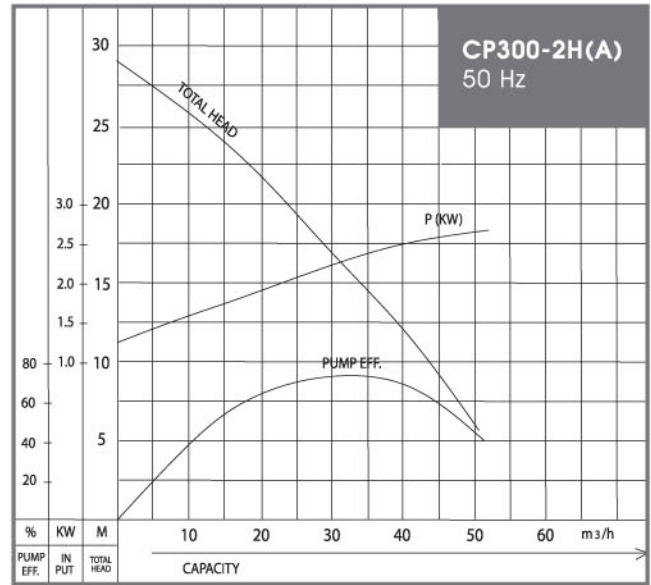
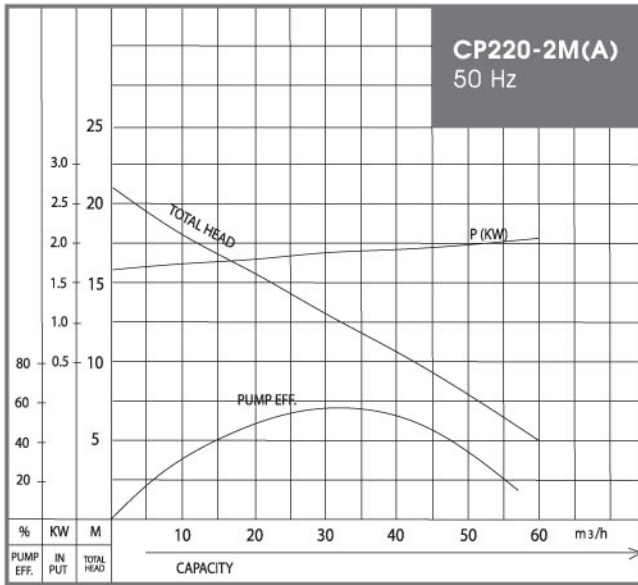
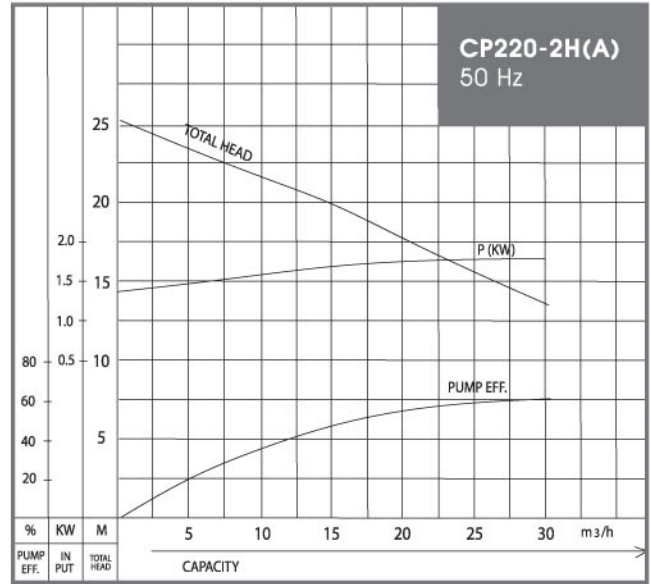


# CP 400-2M(A)

---






# CP 550-2S

CP400-2M(A)  
CP400-4M  
CP550-2H  
CP550-2M  
CP550-2S

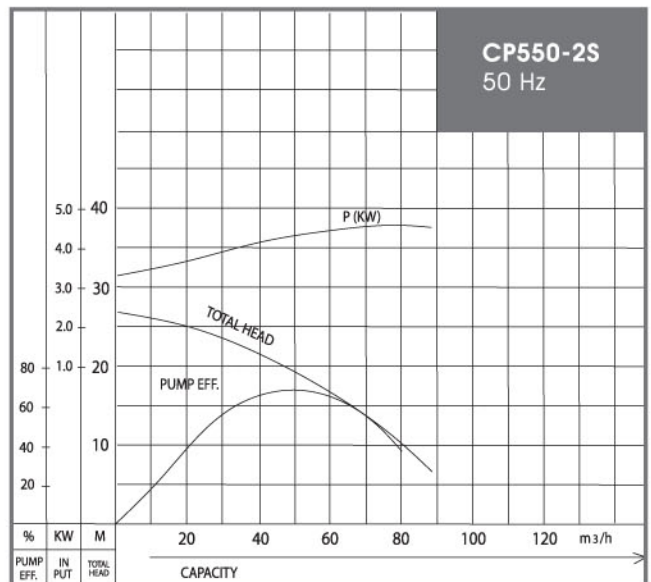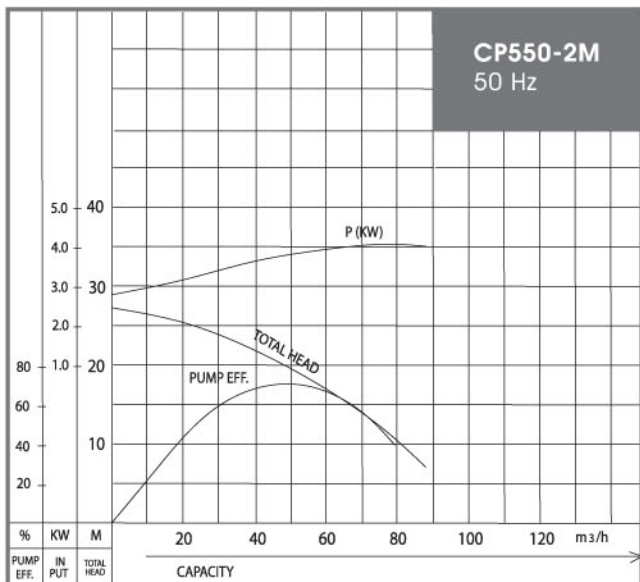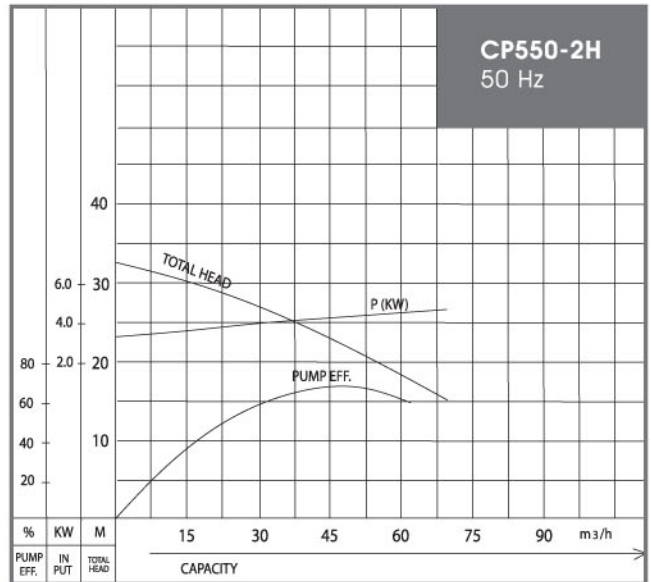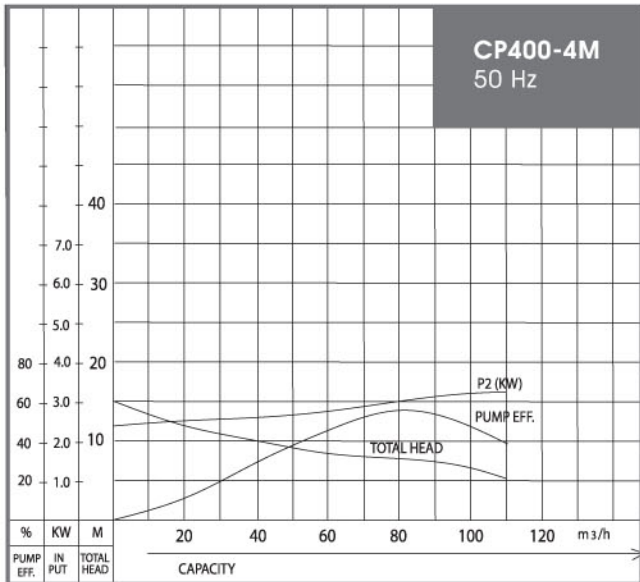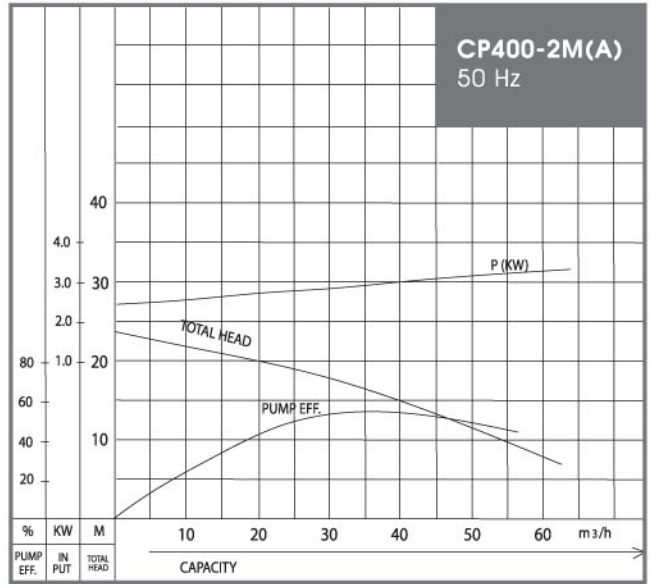


CP  
550-4S  
—  
CP  
750-4S

CP550-4S  
CP750-2H  
CP750-2M  
CP750-2S  
CP750-4S

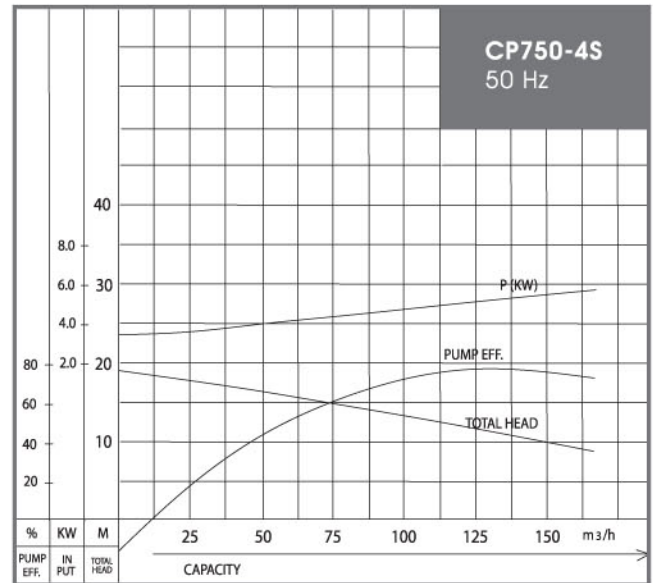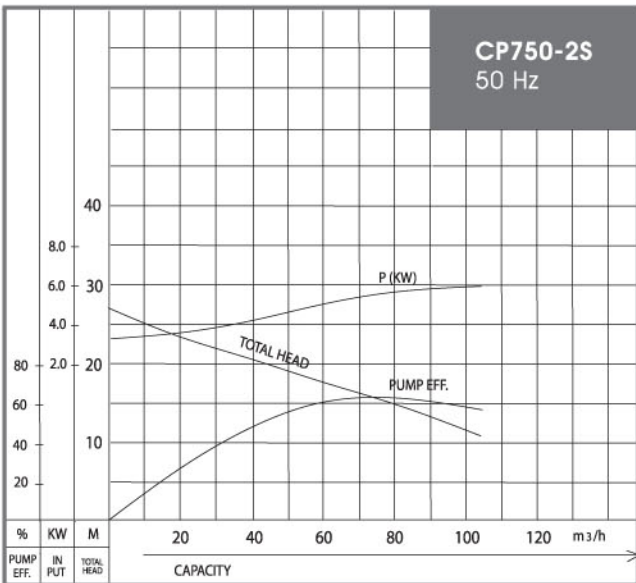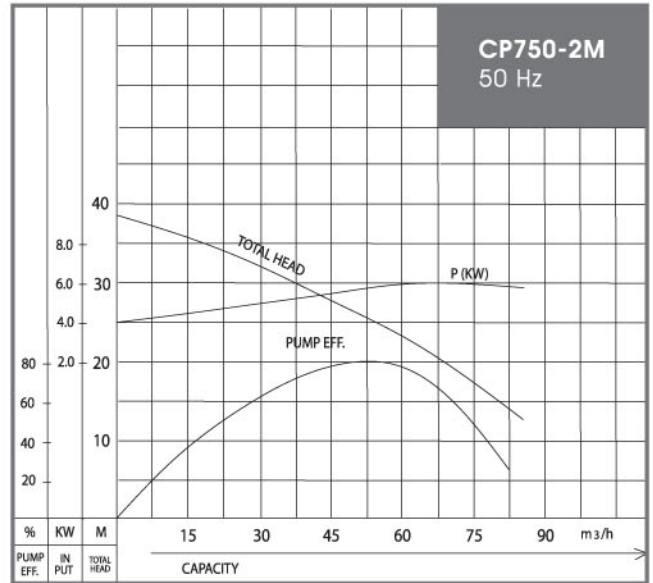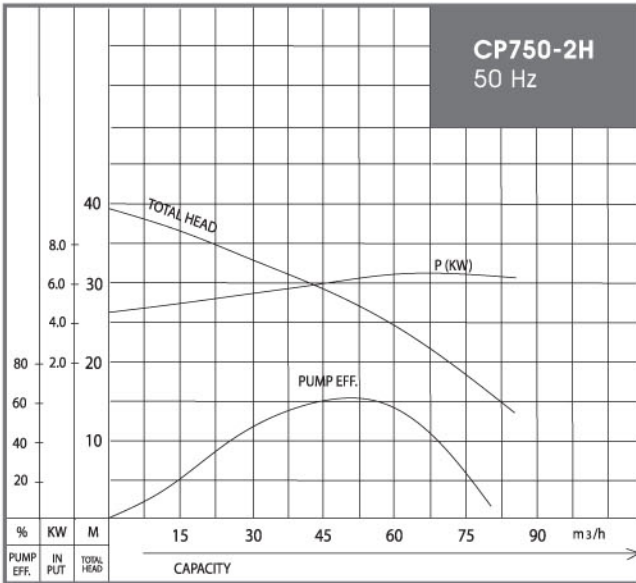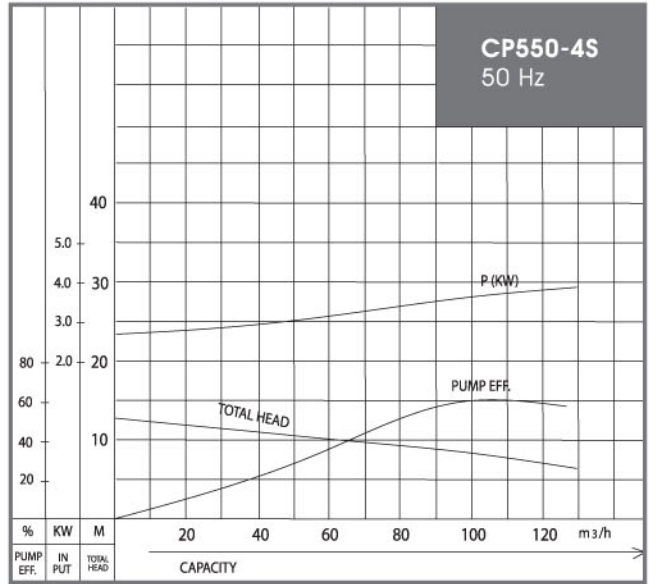


## Automatic-Coupling System Installation (wet installation, stationary)

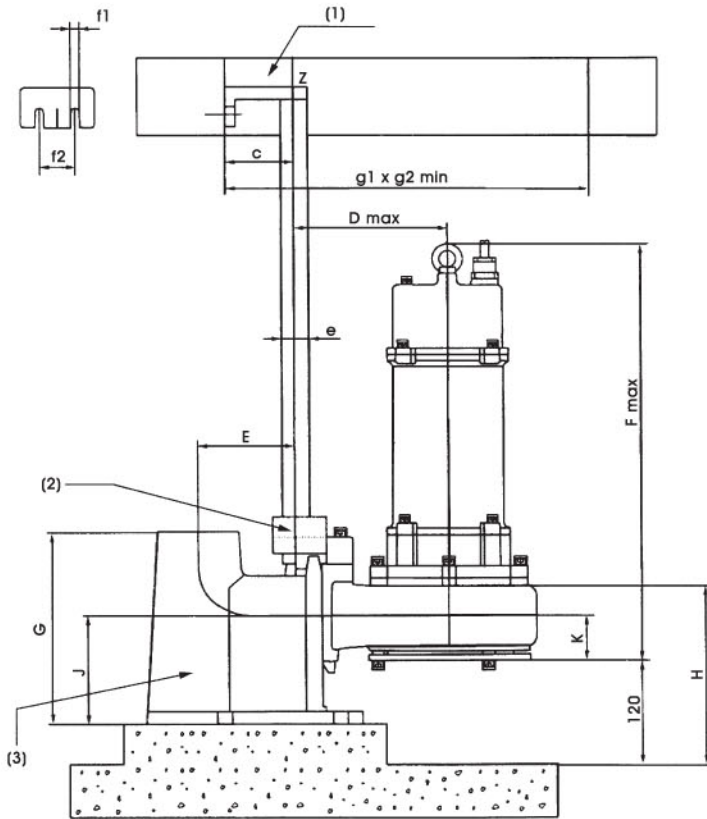


Standard Supply:

- (1) Pedestal
- (2) Bracket
- (3) Retainer

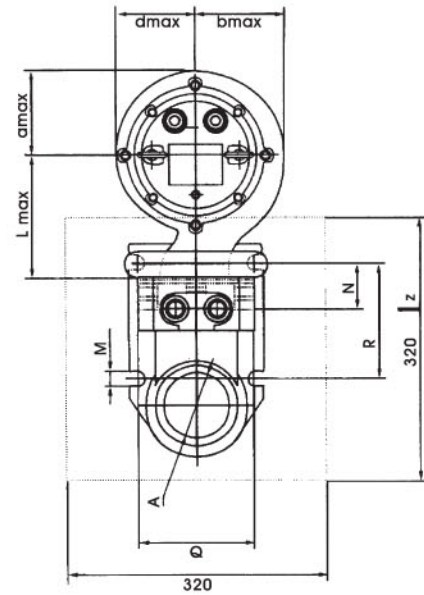

GAK DIMENSIONS

Type	A	C	D	E	F	G	H	J	L	M
50GAK	Rc2"	84	170	75	515	175	185	105	145	14
80GAK	Rc3"	84	205	120	600	240	200	135	175	18
100GAK	Rc4"	105	326	238	825	385	450	205	240	18
150GAK	Rc6"	105	450	310	920	435	335	235	350	18
Type	N	Q	g'xg²(min)	R	a	b	d	k	f1/f2	e
50GAK	50	110	500x500	102	95	110	98	50	12/46	3/4"
80GAK	55	145	500x500	140	120	132	128	80	12/46	1"
100GAK	13	300	500x700	250	212	212	212	191	12/210	2"
150GAK	35	330	500x700	310	210	225	225	185	12/210	2"

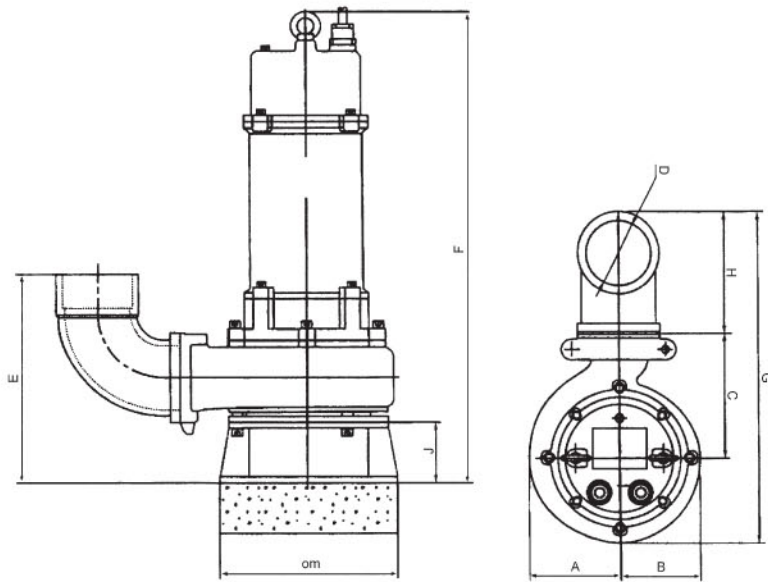

Transportable

PUMP DIMENSIONS

NO	Model	A	B	C	D	E	F	G	H	J	ØM
1	CP75 - 2H(A)	100	90	135	Rc2"	175	460	340	110	50	195
	CPS75 - 2H(A)										
2	CP100 - 2H(A)	110	98	145	Rc2"	200	550	360	110	75	220
	CPS100 - 2H(A)										
3	CP150 - 2H(A)	110	98	145	Rc2"	200	585	360	110	75	220
	CPS150 - 2H(A)										
4	CP100 - 2M(A)	117	96	145	Rc3"	235	550	387	135	75	220
	CPS100 - 2M(A)										
5	CP150 - 2M(A)	117	96	145	Rc3"	235	585	387	135	75	220
	CPS150 - 2M(A)										
6	CP220 - 2H(A)	126	106	165	Rc3"	250	615	415	135	90	240
	CP220 - 2M(A)										
7	CP300 - 2H(A)	126	106	165	Rc3"	250	615	415	135	90	240
	CP300 - 2M(A)										
8	CP400 - 2H(A)	130	128	200	Rc3"	285	775	465	135	105	260
9	CP400 - 2M(A)	170	133	210	Rc3"	285	784	496	135	105	260
10	CP400 - 4M	200	155	240	Rc4"	530	825	620	225	215	450
11	CP550 - 2H	200	155	240	Rc4"	530	915	620	225	215	450
	CP550 - 2M										
	CP550 - 2S										
12	CP550 - 4S	230	180	248	Rc6"	587	975	725	275	215	450
13	CP750 - 2H	200	155	240	Rc4"	530	915	620	225	215	450
	CP750 - 2M										
	CP750 - 2S										
14	CP750 - 4S	230	180	248	Rc6"	587	975	725	275	215	450

### CABINET

Built-in-cabinet with an integrated circuit inside to connect with float switch, TCS & DI. It can switch on/off the pump automatically. Just connecting pump to power directly.

### CABLE

Separate, water-pressure tight encapsulated connection chamber, cable inlet with strain relief and anti-kink protection. On the end of cable, connected with an indicator. Red light for power and yellow light indicates leakage.

### MOTOR

Squirrel-cage motor 110V - 440V, 50 or 60Hz, single/ three phase, 2 pole (2800 rpm), protection type IP 68, insulation class F = 155°, operation system SI, with TCS-Thermal-Control-System by thermal sensors in each phase of the stator to switch off the pump in the case of over-heating of the motor.

### BEARING

Lubricated for life maintenance-free ball bearings. SKF or FAG


### OIL CHAMBER

Filling in with lubricating oil. DI system with a sensor in it to give a timely indication that an inspection is due and that leakage at the shaft seal has occurred.

### MECHANICAL SEAL


Double highly quality sealing unit using a tungsten carbide mechanical seal, independent of direction of rotation and resistant to temperature shock.

### CUTTER

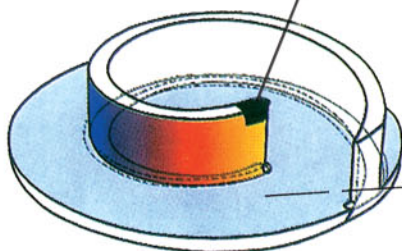

### IMPELLER

Open single channel impeller with large free solids passage. Also with a hardened cutter in the edge, strictly static and dynamic balance checked, pump operating smoothly and fibrous material can be cut in piece and passed.

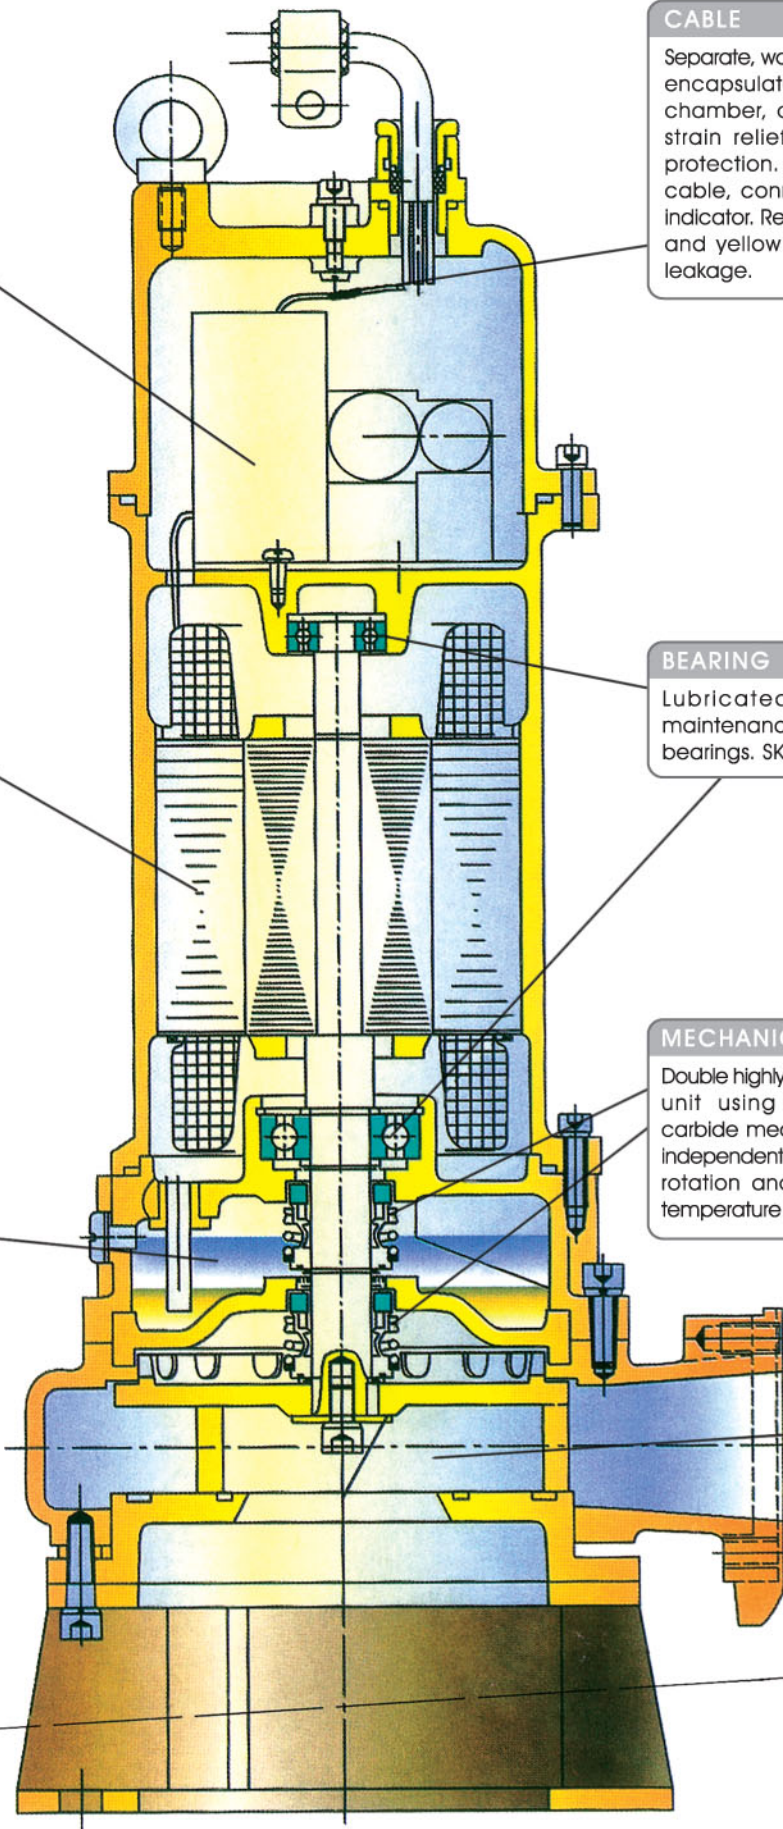



**PARAGON PUMP COMPANY, LLC**

18102 Courtney Breeze Drive  
Tampa, Florida, 33647, USA  
Tel : (813) 994 3356 Fax : (813) 994 1237

**PARAGON PUMP (ASIA) PTE LTD**

37, Kallang Pudding Road, #08-08  
Tong Lee Building Block B, Singapore 349315  
Tel : 6841 2818 Fax : 6841 5988